



## EC DECLARATION OF PERFORMANCE

(System 3)

Issue No: 1

13

Starglaze Windows & Conservatories Ltd.  
 Sternfenster upvc.  
 The Works,  
 Waterside South,  
 Lincoln,  
 LN5 7JD

This document declares that the product:

*Upvc Patio Door*

System Description: *Deceuninck 3000 series*


**External pedestrian doorset intended to be used in domestic and commercial buildings, conforming to the product requirements of BS EN 14351-1:2006+A1:2010 Annex ZA**

Essential Characteristics	Performance	Test Standards	Name, Address and Notified Body No of Test Laboratory	Test report reference and issue date
Watertightness	npd	BS EN 1027	N/A	N/A
Dangerous substances	None	BS EN 14351-1:2006+A1:2010	N/A	In house declaration
Resistance to wind load	npd	BS EN 12211	N/A	N/A
Impact resistance	npd	BS EN 13049	N/A	N/A
Load-bearing capacity of safety devices	N/A	N/A	N/A	N/A
Height (mm)	npd	BS EN 14351-1:2006+A1:2010	N/A	N/A
Ability to release	npd	BS EN 179 and BS EN 1125	N/A	N/A
Acoustic performance	npd	BS EN ISO 140-3	N/A	N/A
Thermal transmittance	1.43Wm2k	EN ISO 10077-1 & EN ISO 10077-2 (or EN ISO 12567-1 and prEN 12567-2)	BSI Group, Kitemark Court, Davy Avenue, Knowlhill, Milton Keynes, MK5 8PP	7842820 6.2.12
Radiation properties	npd	EN 410	N/A	N/A
Air permeability	npd	BS EN 1026	N/A	N/A

This declaration of performance is issued under the sole responsibility of *Starglaze Windows & Conservatories Ltd.*


Signed on behalf of *Starglaze Windows & Conservatories Ltd* :

Signature:



Name and Position: M E Parczuk, Managing Director

Date: 20<sup>th</sup> June 2013

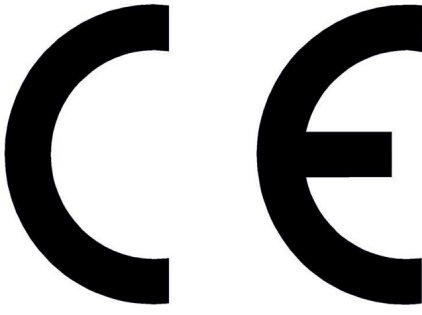	
Starglaze Windows & Conservatories Ltd.	
13	
REF:DECU30/PD	
BS EN 14351-1:2006+A1:2010	
<i>Upvc Patio Door Deceuninck 3000 series</i>	
Intended use not on an escape route	
Water tightness	NPD
Dangerous substances	None
Resistance to wind load	NPD
Load bearing capacity of safety device{if fitted}	N/A
Acoustic performance	NPD
Thermal transmittance	1.43 W/m <sup>2</sup> K
Radiation properties	NPD
Air permeability	NPD